



PIP-MS/MSX Series

812

1212

824

1624

2424

2424MSX

3248


4048

ELECTRICAL SPECIFICATIONS								
Continuous Output	800W	1.2KW	800W	1.6KW	2.4KW	2.4KW	3.2KW	4.0KW
Surge Rating	5 seconds max, 2X							
Input Power Factor	0.8							
Input Voltage Range	90~280VAC (Appliance mode), 170~280VAC (UPS mode)							
Input/Output Frequency	50Hz / 60Hz							
Output Voltage	230VAC±5%							
Output Waveform	Pure Sine Wave							
Output Regulation	< 3% RMS for battery voltage range							
Peak Efficiency	90%	93%	91%	93%				
Nominal DC Voltage	12V	12V	24V			48V		
Max DC Voltage	15.5V	16V	31V			60V		
Transfer Time (2 Modes)	<10ms (UPS mode), <20ms (Appliance mode)**							
Charging Mode	3-stage							
Bulk Voltage (Flooded, AMG/GEL)	14.6V/14.1V	14.6V/14.1V	29.2V/28.2V			58.4V/56.4V		
Float Voltage	13.5V	13.5V	27.0V			54.0V		
Max AC Charging Current	20A	60A	10-20A	20-30A			60A	
No Load Power Consumption	<15W	<20W	<25W			<50W		
Power Saving Consumption	<5W	<10W	<10W			<15W		
Solar Charger								
Max PV Input / Output	500W	500W	600W		1500W	4000W		
Max Charging Current	40A	40A	25A		60A	80A		
Max PV Input Voc, MPPT Range	102V, 15V~80V	100V, 18~80V	75V, 30~66V		145V, 30~115V	145V, 60~115V		
Algorithm	MPPT							
ENVIRONMENTAL / MECHANICAL SPECIFICATIONS								
Certification	CE							
Operating/Storage Temp.	0°C ~ 55°C / -15°C~ 60°C							
Operating Humidity	5~90%RH Non-Condensing							
Dimension	95*240*316mm	355*272*100mm			479*295*140mm	468*295*140mm		
Net Weight	5.2Kg	7.0Kg	7.0Kg	7.1Kg	7.5Kg	11.8Kg	11.5Kg	11.5Kg

** Transfer time may be longer (30ms) when used in parallel configuration and this may cause interruption in certain load.



Only 48V Modles
Parallel Support
now up to 9 units
max! (36kw based
on 4kw/unit)

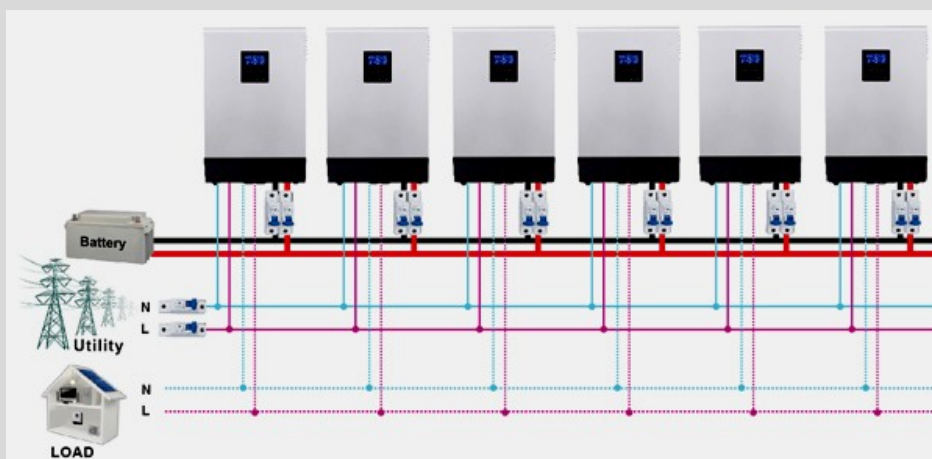

*Product specifications are subject to change without prior notice. MPP Solar is a registered trademark of MPP Solar Inc.